


SEVENTH ELEMENT

Fusion Trigger

for Seventh Element Microswitch Fusion Board

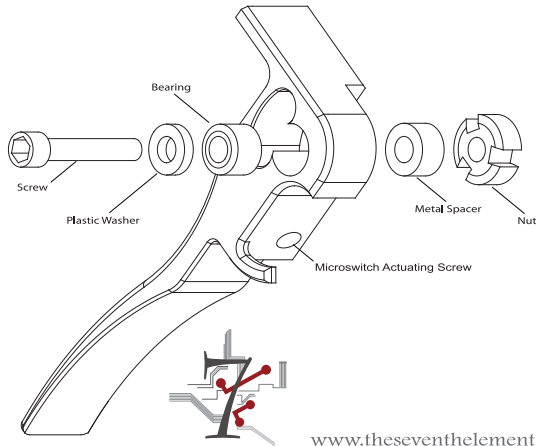


www.theseventhelement.com

Fusion Installation

1. Please refer to your original manual for instruction on removal of trigger assembly.
2. Insert the plastic washer into the screw.
3. Place the metal spacer in the right side of the trigger.
4. Place the screw into the left side of the grip frame flushing against the left inner wall of the grip frame.
5. Insert the trigger assembly into the grip frame. Make sure the metal spacer stays in the trigger.
6. With a thin needle nose plier, hold and place the nut by the right side of the trigger assembly.
7. Guide the screw into the bearing and the metal spacer.
8. Once the screw reaches the nut, use the 1/16 allen key to tighten the screw. Make sure you hold the nut with a plier.
9. Check to make sure the trigger movement is free after the installation.
10. Make sure the microswitch actuating screw is reaching the microswitch and actuating.

www.theseventhelement.com

De Creo Perfectio



Seventh Element

The "Seventh Element" logo is either registered trademark or design trademark of Seventh Element, Inc.

www.theseventhelement.com